



WAM[®] Inc.

contact
FESCO Direct
www.fescodirect.com
(800) 880-7350



SILO VENTING FILTER

SILOTOP[®]

R01 Series



**EXCELLENT FOR
READY MIXED
INDUSTRIES !**

- ✓ More comfortable maintenance height
- ✓ Lockable hinged cover
- ✓ Free access to filter elements and in cover integrated cleaning system
- ✓ Easier replacement of filter elements
- ✓ Flanged silo connection

SILO



Obstruction-free extruded aluminum manifolds for optimum air flow



Drain point

BODY	FILTER SURFACE	MAX. HEIGHT WHEN CLOSED	MAX. HEIGHT WHEN OPEN	lbs (kg)
Ø 31.5 inches (800 mm)	264 ft ² (24.5m ²)	45 inches (1145 mm)	73 inches (1850 mm)	225 (102)



Filter element clamps reduce maintenance time




Heavy-duty 16 gauge 304 stainless steel body with bottom flange - thickness 0.04




Inspection hatch

Aluminum air tank (corrosion-resistant)

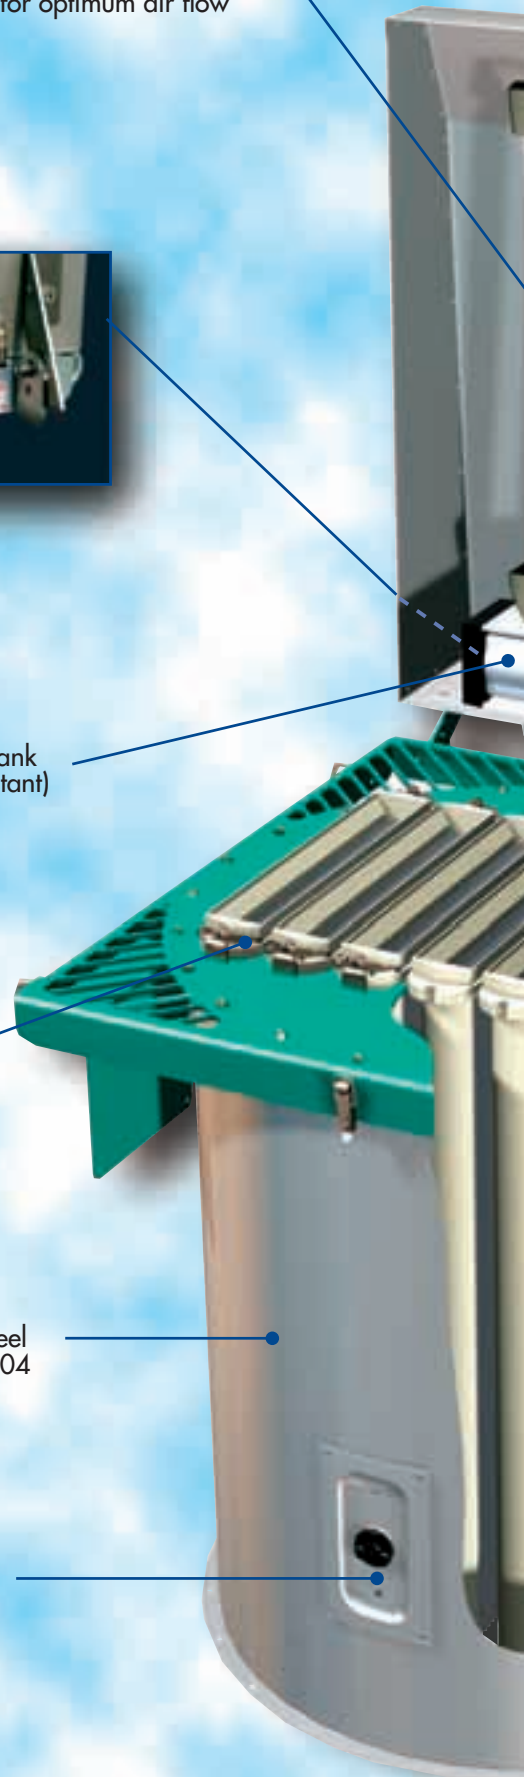

STOP[®]

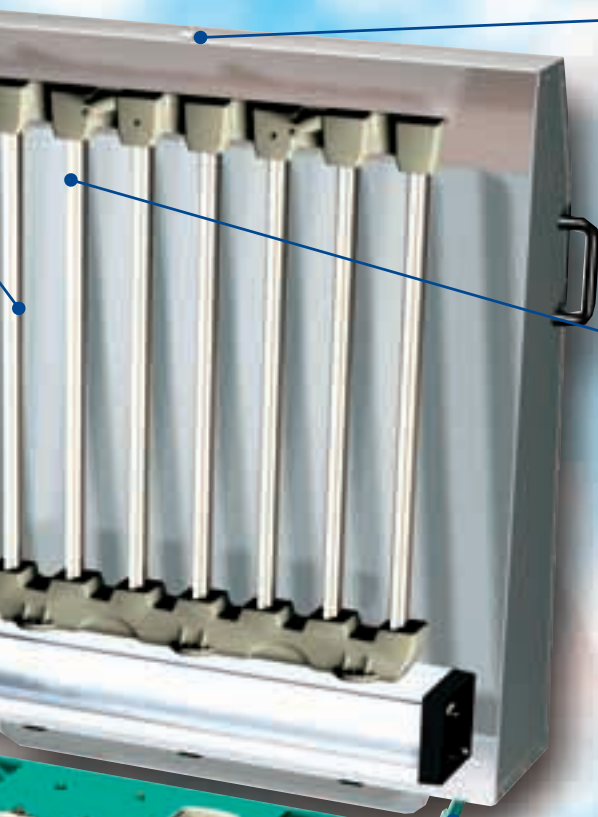

Weather protection cover with lockable snap hook

Manifolds integrated into the hood




Weather protection cover "Autolock" hinges self-locking when open

Steel frame with integrated birdcage

CARTRIDGES INCLUDED!


POLYPLEAT[®] filter cartridges with integrated Venturi shafts guarantee optimum filter surface - air to cloth ratio



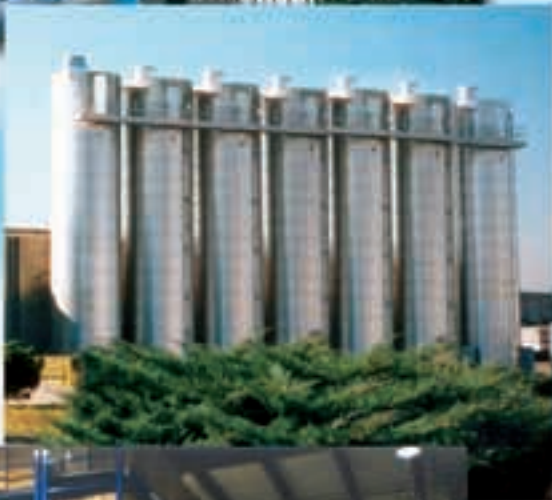

Huge inventory available for immediate delivery!

OTHER PRODUCTS



Cement Screw Conveyors



Vertical Srew Conveyors



Butterfly Valves



Slide Valves



Pressure Relief Valves



Level Indicators



Rotary Valves



Pinch Valves

N.B.: Rights reserved to modify technical specifications.



Georgia Division
75 Boulderbrook Circle
Lawrenceville GA - 30045 - USA
☎ 770 - 339 67 67
☎ 770 - 339 47 27
videoconference 678 377 08 81
e-mail: wamgeorgia@waminc.com
internet: www.waminc.com

Texas Division
1300 Triad Blvd.
Fort Worth, TX - 76131 - USA
☎ 817 - 232 26 78
☎ 817 - 232 26 76
e-mail: wamtexas@waminc.com
internet: www.waminc.com

WAM.035.05.US 08/02

